



LoRaWAN™ compatible STREET LIGHTING REMOTE MANAGEMENT



[FRE-220-NEMA LoRaWAN™ compatible luminaire controller - data sheet] January 10, 2017 Ver 1.2

FRE-220-NEMA LoRaWAN™ COMPATIBLE LUMINAIRE CONTROLLER

- › **NEMA socket** connected (ANSI C136.41)
- › Enables **individual remote management** of streetlight lamps with electronic ballast up to 400W.
- › Specially designed and optimized **for LoRaWAN™** (long range RF wide area networks).
- › **Autonomous operation** based on predefined schedules and light level sensor.
- › **Bandwidth efficient** with minimal communication requirements.
- › **Dedicated high-security memory** for encryption keys storage.
- › Wide range of **electrical parameters monitoring**: Wh, VARh, V, W, A, VAR, PF and frequency.
- › **Advanced data synchronization** and notification mechanism.
- › **Battery operated RTC**, protected against unforeseen grid faults.
- › **External infrared interface** for security keys transfer and local configuration.
- › Integrated **light level sensor**
- › **Over The Air** (OTA) firmware update



inteliLIGHT® is a registered trademark of FLASHNET | LoRaWAN™ is a registered trademark of Semtech



FLASHNET




03-9243358 :ספק ▪ 03-9243352 :לו ▪ 7042 פ"ת .ד.ת.14 אודם 'חן
www.hypertech.co.il ▪ sales@hypertech.co.il



LoRaWAN™ compatible STREET LIGHTING REMOTE MANAGEMENT



[FRE-220-NEMA LoRaWAN™ compatible luminaire controller - data sheet] January 10, 2017 Ver 1.2

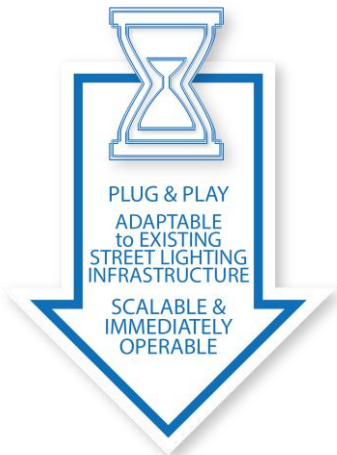

FRE-220-NEMA-IL*	
Lamp Type	LED, CF, HID with electronic ballast
Connection	7pin NEMA socket (ANSI C136.41)
Maximum lamp power	up to 400W
ON/ OFF function	✓
Dimming	✓
Dimming range	30%-100%
Dimming steps	stepless
Control interface	0-10V / 1-10V / DALI
External interface	infrared
Network interface	LoRaWAN™
RF spectrum	915-917MHz
Tx Power	100mW
Bandwidth efficient	✓
Advanced synchronization mechanism	✓
Firmware update	IR (infrared) / OTA (over the air)
Communication protocol	LoRaWAN™: Class C or Class A
Security	Dedicated high-security memory for encryption keys storage
Power supply	85 - 260VAC / 50Hz-60Hz
Internal memory	✓
Power consumption	Max. 0.5W
Precision Real Time Clock (RTC)	Battery operated
Real-time lamp operation	LoRaWAN™ Class C networks only
IP rating	IP66
Operating temperature range	-25°C to +65°C
Dimensions (diameter x height)	76 x 96 mm
Compliant standards	CE, RoHS, EN 61000-3-2(2014), EN 61547(2009), EN 60068-2-1(2007), EN 60068-2-2(2007), Prequalified according to ETSI EN 300 220
Certifications	CE / FCC (in progress)
Measured parameters	
Lamp power	✓
Line voltage	✓
Current	✓
Active power	✓
Reactive power	✓
Apparent power	✓
Power factor	✓
Energy consumption (active/ reactive)	✓
Lamp / controller - running hours counter	✓
Lamp On / Off cycles counter	✓
Alarms monitored	
Over/ under voltage detection	✓
Over/ under current detection	✓
Lamp or ballast fault detection	✓
Device failure	✓
Configurable parameters	
Astrologic calendar scheduler	✓
Start state	Photocell / Schedule / Manual
ON/OFF power threshold	✓
Over/ under voltage threshold	✓
Over/ under current threshold	✓
Strike retry count	✓
Fade time	✓
Lamp warming/cooldown time	✓
Light level threshold	✓
Data transmission setup	✓
Alert priority setup	✓
Operation mode	ON/ OFF / dimming

*Product subjected to development according to published LoRaWAN regional specification



FLASHNET



ח'י אודם 14, ת.ד. 7042 פ"ת • 03-9243352 :טל • 03-9243358 :פקס
www.hypertech.co.il • sales@hypertech.co.il