

ZULU-G-GPRS / ZULU-N-GPRS

GPRS & GPS Modem with ARM Cortex M4 Processor,
USB and RS232 Serial Port Interfaces



Key Features

- USB serial port interface
- RS232 serial port interface
- GPRS global coverage
- GPS receiver (ZULU-G-GPRS)
- ARM Cortex M4 32bit processor
- Wide supply voltage 5 - 42V
- DIN rail mountable
- 36-way connector for all interfaces
- 2000mAh battery option
- 10 GPIO lines
- CAN, 1-Wire and I2C interfaces

General Description

The ZULU range of GPRS modems are amongst the most advanced and capable modems available today. The range is available as two main versions - with or without GPS. Further options include a 2000mAh battery and an upgrade of flash memory to a total of 128Mbit. The ZULU range can be used as a simple modem, or with application software within the GPRS module. But its real strength, for the user, is as a comprehensive computing platform using its ARM Cortex M4 32bit processor connected to the GPRS engine - all in one package. The ZULU design has been extensively tested and represents amazing value as a GPRS connected powerful 32bit computing engine.

The ZULU modems have an ARM Cortex M4 32bit processor as standard, independent of the wireless module, for customers to develop their software on. The ZULU has both USB and RS232 serial ports with 10 GPIO lines as standard. The ZULU is housed in a tough plastic enclosure that is either screw or DIN rail mountable.

The ZULU-G-GPRS is the GPRS version with GPS capability.

The ARM Cortex M4 32bit processor manages the Telit

module and is available for the user to program custom applications. The features of the standard ZULU are as below:

- USB serial port interface
- RS232 serial port interface
- Debug serial port interface
- Onboard 600mA solid state relay
- 5 x GPI
- 4 x GPO
- 2 x ADC
- 2 x DAC
- CAN interface
- 1-wire interface
- I2C interface
- Boot load line
- Ignition line
- Accelerometer

ZULU-G-GPRS / ZULU-N-GPRS

GPRS & GPS Modem with ARM Cortex M4 Processor,
USB and RS232 Serial Port Interfaces

All connections to all interfaces of the modem can be made through the 36-way connector with the exception of the antenna(s) and USB. The ZULU also has a separate Mini USB and RS232 socket, and an RJ12 power socket. The status of the ZULU is shown by three easily viewable LEDs all of which are ultimately programmable to the user's needs. The ZULU range also has an internal battery option of a 2000mAh Li-ion battery – this can be specified at the time of ordering or can be retro-fitted (see ZULU-GB-GPRS).

Additionally the ZULU has an integral accelerometer and features an ignition line, other modem control and reset lines on the RJ12 connector making it very suitable for a vehicle tracking and control unit, with a small amount of microcontroller software design. The 600mA solid state relay is also a standard feature of the ZULU range and is accessible via the 36-way connector.

The ZULU series is packaged in a tough blue ABS plastic box that is DIN rail or screw mountable and has dimensions of 134 x 74 x 33mm. In all the ZULU is designed to be your M2M modem and main computing engine in one package using a well understood and very capable microcontroller range that is easy to program with.

The ZULU modem range has been designed for long life and is available in UMTS and GPRS form with LTE coming very shortly - all with the same design and features making it easy for the user to design once, and use the many versions with very little effort.

The ZULU range has a number of accessories available:- JTAG programming cable, OEM power cable, 0.5M and 1M 36-way cable and connector with unterminated ends, 12V wallblock power supply with RJ12 connector.



ZULU Power Connector



ZULU 36-Way Connector



ZULU Mini USB and RS232 Connector



ZULU LEDs, GSM and GPS Antenna Connector and SIM Card Slot

ZULU-G-GPRS / ZULU-N-GPRS

GPRS & GPS Modem with ARM Cortex M4 Processor,
USB and RS232 Serial Port Interfaces

Electrical Specifications



Temperature Range:	-30 to +80°C
Operating Frequencies:	Quad Band GSM - 850, 900, 1800, 1900MHz
Power Supply:	5 - 42V
Battery (Optional):	2000mAh Li-ion
GPIO Input Voltage:	35V
GPIO Output Voltage:	0 - 42V
Relay:	600mA

GPS Specifications (ZULU-G-GPRS)

Frequency Band:	GPS (L1), Glonass (L1, FDMA), Galileo (E1)
Sensitivity:	Cold start autonomous -146dBm Hot start autonomous -160dBm Tracking mode -162dBm
Accuracy:	1.5m
TTFF:	Cold start <35sec Hot start 1sec
Output Format:	GPS NMEA 0183
Power Consumption:	Acquisition 98mA @ 3.8V Tracking (GPS) 55mA @ 3.8V Tracking (GNSS) 65mA @ 3.8V

Mechanical Specifications

Dimensions:	134 x 74 x 33mm
Weight:	125g
Antenna Connectors:	x 1 SMA Female (GSM) x 1 SMA Female (GPS)
Mounting Method:	DIN Rail or Screw Mount

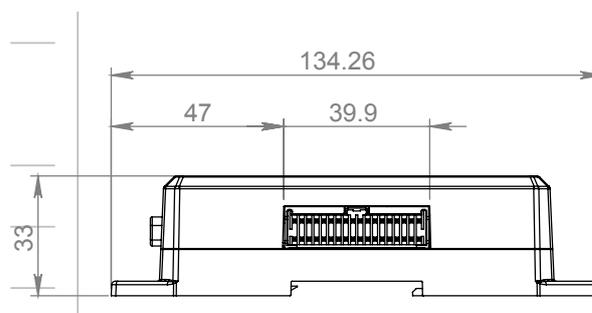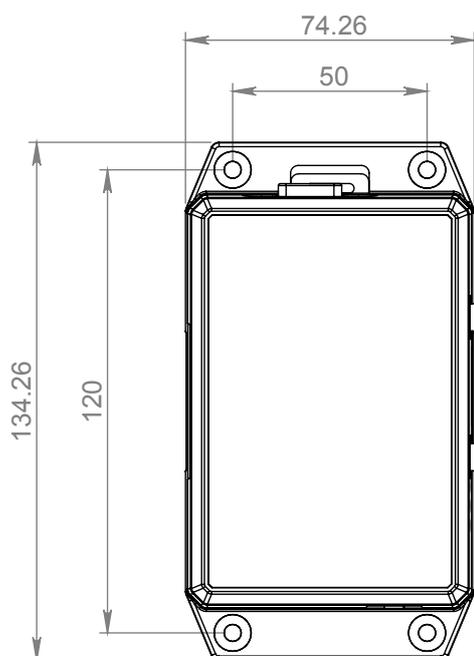

ZULU-G-GPRS / ZULU-N-GPRS


GPRS & GPS Modem with ARM Cortex M4 Processor,
USB and RS232 Serial Port Interfaces

STM32F4 Microcontroller

The ZULU is driven by the ARM Cortex M4 32bit processor, which has 192KB of RAM and 16Mbit of flash memory for customer use, which is expandable to 128Mbit. The ARM Cortex M4 32bit processor is a popular and well known microcontroller with a considerable amount of code already written for it. The ARM Cortex M4 32bit processor 'Discovery Board' is also a popular development platform and has considerable documentation to help with code development.

The ZULU itself can emulate the 'Discovery Board' and therefore be used in this mode for easy code development by the customer, similar to a standalone Discovery Board. The ARM Cortex M4 32bit processor is a very low power micro and within the ZULU consumes around 50mA when fully loaded and running. Conversely it can be put into deep sleep thereby taking a few microamps. The processor itself is capable of considerable multithreading with a number of layers of software. Many of the ZULU peripheral interfaces are native to the ARM Cortex M4 32bit processor. As a result they can be easily configured as required and will be a known quantity to anyone familiar with the STM32 processor family.

ZULU-G-GPRS System Diagram

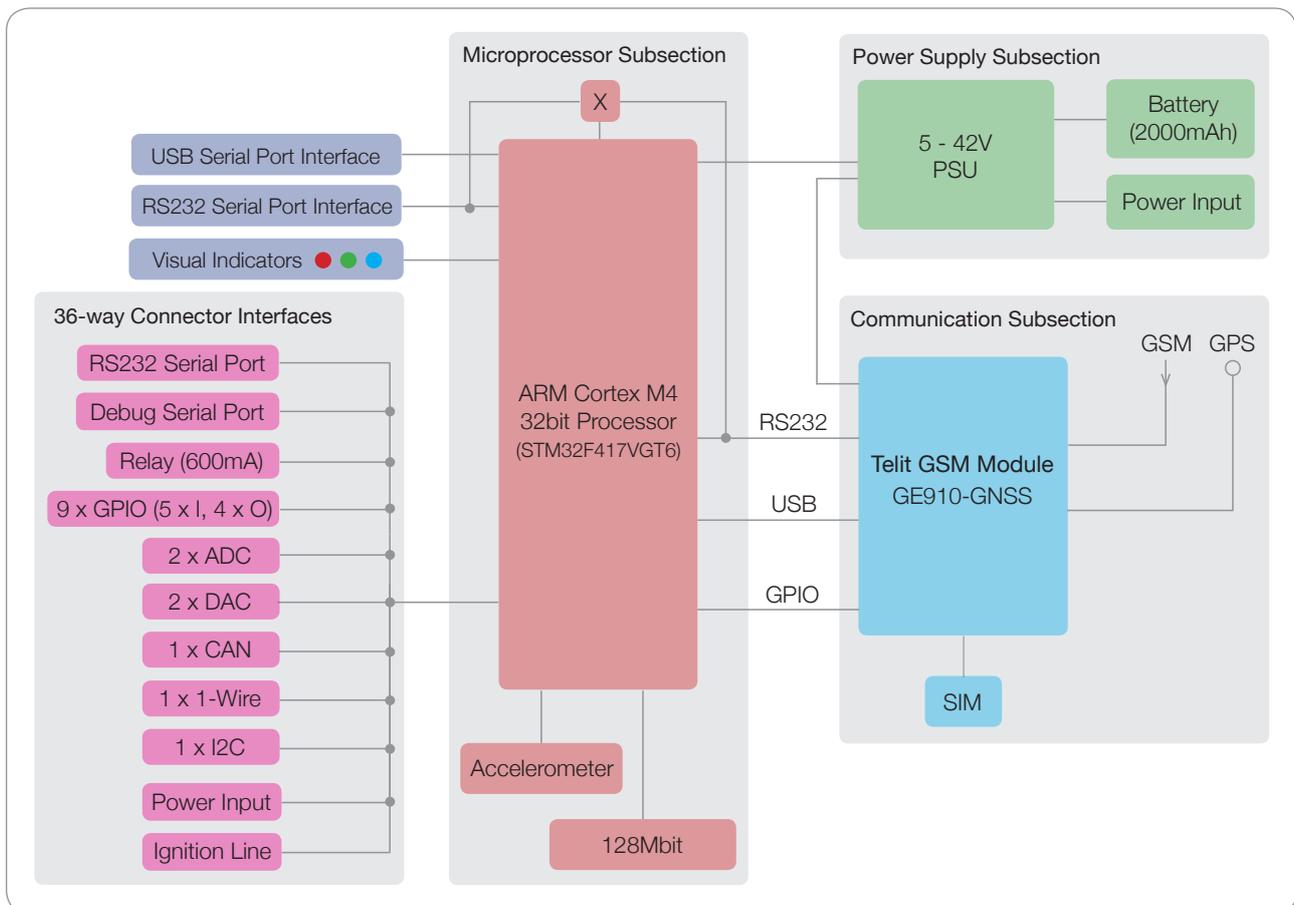

ZULU-G-GPRS / ZULU-N-GPRS

GPRS Modem with ARM Cortex M4 32bit Processor,
USB and RS232 Serial Port Interfaces

ZULU-N-GPRS System Diagram

