



14 Odem ST. P.O.B. 7042 Petach Tikva 4917001, ISRAEL | Office: +972-3-924-3352

XIS-5878[™]



PRODUCT HIGHLIGHTS

Artificial Intelligence (AI)

Enhanced Imaging™

Windows® Operating System with Intel® Core™ Processor

Tall and Narrow Tunnel

180kV Generator





PRODUCT DESCRIPTION

ABOUT ASTROPHYSICS

The XIS-5878TM is a compact and powerful X-Ray Inspection System (XIS) designed for screening heavy bags and objects. The XIS-5878TM is capable of supporting up to 165kg (364lbs) and features a low conveyor of only 30cm (12") above the ground, convenient for loading and unloading. The #1 global manufacturer of critical infrastructure products, Astrophysics is the clear choice.

Since 2002, Astrophysics has led the industry in research and development, creating integrated solutions to advance the critical security missions of our customers and partners. Headquartered outside of Los Angeles, CA in the USA, Astrophysics has over 40,000 systems deployed in more than 150 countries, safeguarding critical infrastructure, aviation, and ports and border sites worldwide.

XIS-5878[™]

GENERAL SPECIFICATIONS

Tunnel Size: 58.4 cm x 78.3 cm (WxH) 23.0" x 31.0"

Dimensions:¹ 252.4 cm x 137.1 cm x 126.0 cm

(LxWxH) 99.4" x 54.0" x 49.6" Net Weight: 635 kg (1400 lbs) Shipping Weight: 900 kg (1985 lbs)

Conveyor Speed: 23 cm/s (45 ft/min) Forward or Reverse

Conveyor Height: 30 cm (12") from Floor

Conveyor Capacity: 165 kg (360 lbs) Evenly Distributed Load

X-RAY GENERATOR & IMAGE PERFORMANCE

Voltage: 180kV, Operating at 165kV

Tube Current: 1.2 mA

Wire Resolution:² 40 AWG Typical, 38 AWG Standard Steel Penetration:² 39 mm Typical, 37 mm Standard

Cooling: Sealed Di-Electric Oil Bath with Forced Air Duty Cycle: 100%, No Warm-Up Procedure Required

Beam Direction: Horizontally Sideward

COMPUTER & VIDEO

Platform: Windows® 10 OS Memory: 8 GB RAM Storage Capacity: 256 GB SSD

Display Type: Dual 21.5" Flat Panel Monitors

Display Resolution: 1920 x 1080

ENVIRONMENTAL

Operating Temperature: 0°C to 40°C / 32°F to 104°F Storage Temperature: -20°C to 60°C / -4°F to 140°F Humidity: Up To 95% Non-Condensing

ELECTRICAL

System Power: 110 VAC +/- 10% 50/60Hz, 15 Amp Max

220VAC +/- 10% 50/60Hz, 10 Amp Max

Power Conditioner: Automatic Voltage Regulator (AVR), 600VA

HEALTH & SAFETY

Compliant with USFDA Center for Devices and Radiation Health Standards for Cabinet X-Ray Systems (21-CFR 1020.40)

Typical radiation leakage is less than 0.1 mR/hr

(Leakage less than 0.5 mR/hr permitted by U.S. Federal Standards)

FEATURES

STANDARD

3 & 6 Color Imaging Black & White Imaging Enhanced Imaging[™] High Penetration Function Organic/Inorganic Imaging

Pseudo Color Reverse Monochrome

Geometric Image Distortion Correction

Material Discrimination Real-Time Image Manipulation Atomic Z-Number Measurement

9 Quadrant Zoom Continuous Scanning Continuous Zoom Up to 64x Vertical Zoom Panning

Auto Image Archiving Image Review Save Image (RGB) Image Annotation JPEG Conversion

Multi-Tier Accessibility Network Ready Real-Time Self Diagnostics Baggage Counter

OPTIONAL

Artificial Intelligence (AI)
Barcode Scanning
Density Alert
Local Language

Local Language Safe Passage® Computer Based Training

Screener Assist Software


Test Case
Threat Image Projection (TIP) Software

Dual 24" Flat Panel Monitors

Custom Paint
Environmental Kit
Entry/Exit Roller Tables
Footmat Operator Interlock
Internal/External UPS
Roller Bed

Radiation Meter Remote Workstation Configuration

External USB Ports Conveyor Capacity Load Increase Variable Conveyor Speed

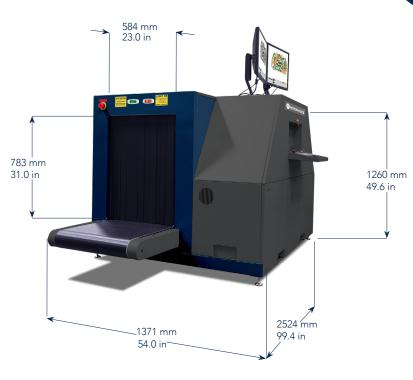

ISO 9001 & ISO 14001 CERTIFIED









Weight and dimensions of the system may vary depending on customization.

²As tested on Astrophysics Inc. Test Piece.

³Optional Features may affect lead time, price, and weight of product. Please contact your Astrophysics Sales Representative for more information.

Due to continued product development, Astrophysics Inc. reserves the right to amend all technical specifications without prior notice. Contact sales@astrophysicsinc.com for the most updated brochures.



